


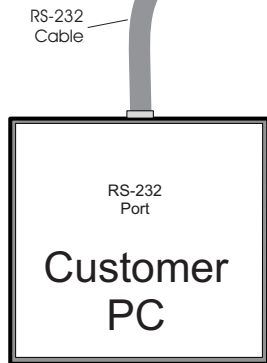
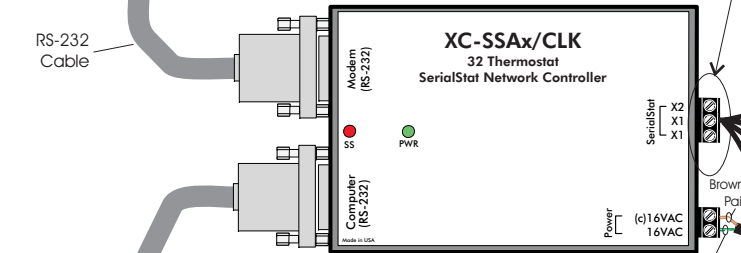


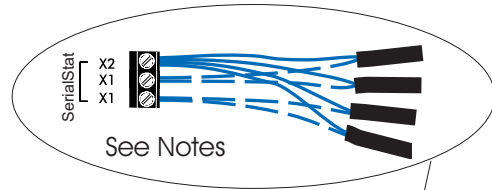


SerialStat Controller Interface

Installation and Wiring for Home-Run (Star) Configuration



Maximum length of any 8 thermostat cluster = 750 ft
Maximum total length connected to controller = 3,000 ft

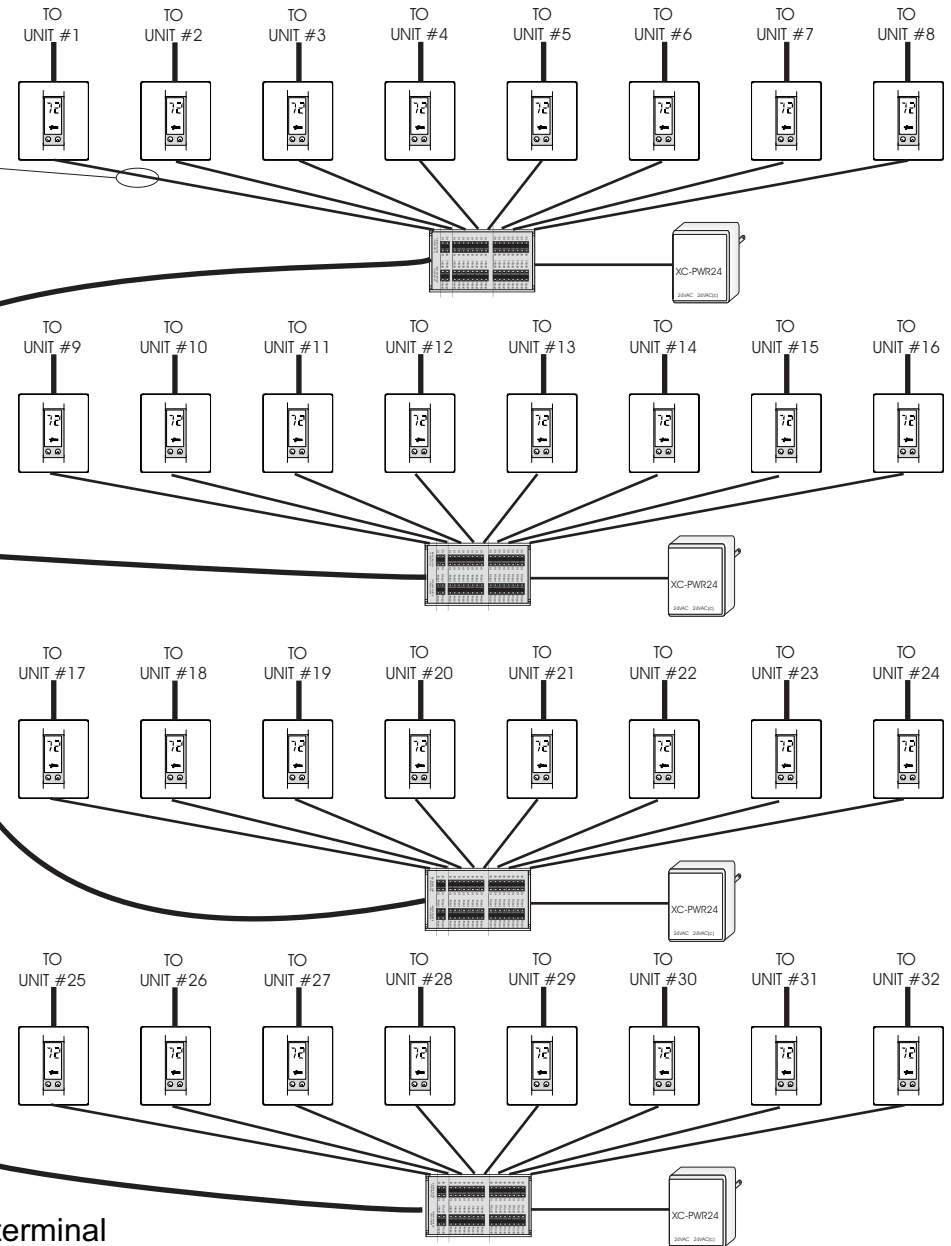

NOTES:

- 1) Balance the total number of SerialStats between the two X1 terminal screws on the XC-SSAx/CLK
- 2) Terminate all X2 wire connections together at the XC-SSAx/CLK, X2 terminal
- 3) No more than 16 SerialStats can be wired to one XC-SSAx/CLK, X1 terminal
- 4) No more than 8 SerialStats can be wired to one Home-Run section
- 5) Use a similar quantity of SerialStats on each Home-Run section

XCI Corporation

1304 W. Walnut Hill Lane, Suite 200, Irving, TX 75038
Voice: 972-580-1166 FAX: 972-580-7774 www.xciCorp.com

